

# Bush Hog® TOUGH 3008 Series Rotary Cutters

## BUSH HOG® TOUGH FEATURES

**TOUGH 10 Gauge Deck Construction**

**TOUGH 7 Gauge Strongbacks**

**TOUGH 1/4 Inch Sidebands**


**TOUGH Replaceable Wide Skids**

**TOUGH 5 Year Gearbox Limited Warranty**

**TOUGH Powder Coat Paint**



Model 3008

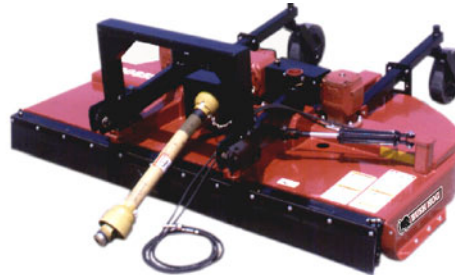

Model 3008 SH

MODELS	3008	3008 SH
Cutting Width	8 ft 2 inches	8 ft 2 inches
Cutting Capacity	2 inch diameter	2 inch diameter
Dimensions (width x length)	8 ft 10 inches x 7 ft 11 inches	8 ft 10 inches x 7 ft 11 inches
Transport Width	8 ft 5 inches	8 ft 5 inches
Type Hitch	3 Point Cat. I & II standard and quick hitch Cat. I & II semi-mount, center pull	Cat. I & II semi-mount offset, center to 13 inches offset
Cutting Height	2 inches to 13 inches	2 inches to 15 inches
Deck Thickness	10 gauge	10 gauge
Side Bands	1/4 x 10 inches	1/4 x 10 inches
Minimum Tractor HP	50 PTO (Lift), 40 PTO (Pull)	40 PTO (Semi-mount)
Driveline	ASAE Cat. 4	ASAE Cat. 4
Cross Shaft	Fiber Disc	Fiber Disc
Gearbox HP	(3) 120 (center), 90 (outboard)	(3) 120 (center), 90 (outboard)
Tractor PTO Speed	540 RPM	540 RPM
Driveline Protection	4 Plate PTO Slip Clutch	4 Plate PTO Slip Clutch
Height Adjustment	Heavy duty axle - manual or hydraulic	Heavy duty axle - manual or hydraulic
Blade Holder(s)	Round	Round
Blades	1/2 inch x 4 inch (uplift)	1/2 inch x 4 inch (uplift)
Blade Tip Speed	16,345 FPM (540 RPM)	16,345 FPM (540 RPM)
Blade Overlap	3 inches	3 inches
Tires	Laminated, pneumatic, airplane	Laminated
Axles	Selection: Rigid Twin Beam Axle Bundle or Heavy Duty Axle Bundle with Shock Absorber on lift or semi-mount	
Deflectors	Standard front belting and rear bands (chains optional)	Standard front belting and rear bands (chains optional)
Safety Tow Chain	Standard on pull model	N/A
Approximate Weight	1683 lbs (Lift), 2118 lbs (Pull)	1845 lbs (Semi-mount)

**Warranty** 1 year limited warranty with a 5 year gearbox limited warranty

**FEATURES** • Standard slip clutch • High blade tip speeds • Deep sidebands • Quick detach gearbox shields

