

Bush Hog® TOUGH

290 Series Rotary Cutters

BUSH HOG® TOUGH FEATURES

TOUGH EZ Clean Sloped 10 Gauge Decks


TOUGH 1/4 Inch Sidebands

TOUGH Replaceable Full Length Skids

TOUGH 130 HP Bush Hog Gearbox

TOUGH 5 Year Gearbox
Limited Warranty

TOUGH Powder Coat Paint

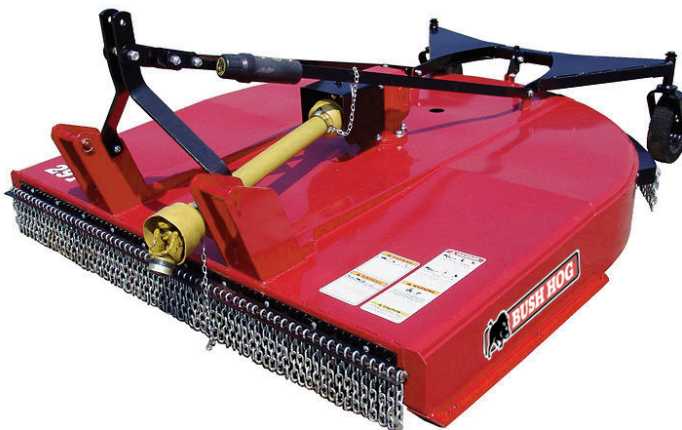

MODELS	295	296	297
Cutting Width	5 ft	6 ft	7 ft
Cutting Capacity	3 inch diameter	3 inch diameter	3 inch diameter
Cutting Height	11/2 to 10 1/2 inches	11/2 to 10 1/2 inches	11/2 to 10 1/2 inches
Dimensions (transport width x length)	5 ft 6 inches x 8 ft 8 inches	6 ft 6 inches x 9 ft 8 inches	7 ft 6 inches x 10 ft 8 inches, 10 ft 1 inch (single wheels), (double wheels)
Type Hitch	3 Point Cat. I, Cat. II Standard & QH	3 Point Cat. I, Cat. II Standard & QH	3 Point Cat. I, Cat. II Standard & and QH
Deck Thickness	10 gauge	10 gauge	10 gauge
Sidebands	1/4 x 13 inches	1/4 x 13 inches	1/4 x 13 inches
Driveshaft	ASAE Category 4	ASAE Category 4	ASAE Category 4
Gearbox	130 HP	130 HP	130 HP
Tractor PTO Speed	540 RPM	540 RPM	540/1000 RPM
Driveline Protection	Slip Clutch Standard	Slip Clutch Standard	Slip Clutch Standard
Blade Holder(s)	Round	Round	Round
Blades	1/2 x 4 inch uplift	1/2 x 4 inch uplift	1/2 x 4 inch uplift
Blade Tip Speed	15,551 FPM	15,268 FPM	15,268 FPM/540 RPM 15,047 FPM/1000 RPM
Tires	Single Laminated	Single Laminated	Single or Dual Laminated
Minimum Tractor HP	35 PTO	45 PTO	55 PTO
Front and Rear Deflectors	Front belting and rear bands standard, all 3 models		
Approximate Weight	906 lbs	1095 lbs	1328 lbs, 1420 lbs
Warranty	1 year limited warranty with a 5 year gearbox limited warranty		
Options	Front and rear chains	Front and rear chains	Front and rear chains

FEATURES

Available in major tractor colors

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



P. O. BOX 849
MOBILE, ALABAMA 36601 USA
EMAIL: mobile@opico.com
TEL +1 251 438 9881