

TERRA-RISER™



Erb & Roberts, Inc.


"Making farming easier"

EAW - EABW - EACW


Wheel Offset Harrow

APPLICATIONS

Soil preparation for planting
Pulverization
Aeration

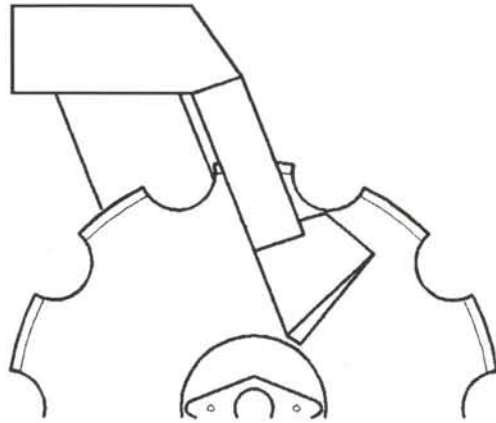

Swept back bearing hangers reduce impact damage and clogging

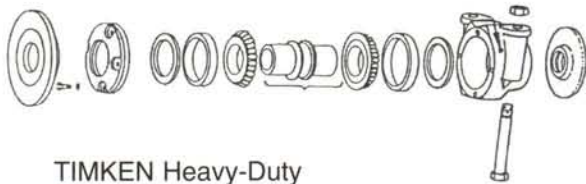

TIMKEN Heavy-Duty
Roller Bearing Assembly

*Horsepower may vary according to soil conditions or difficult terrains

EACW series - 17 3/4" disk spacing also available

SPECIFICATIONS

Heavy duty structural steel main frame
2 1/8" (53.9 mm) high strength round axles
Heavy duty Timken dual tapered roller bearing assemblies

STANDARD EQUIPMENT

Hydraulic Wheel Lift and tongue leveling
Steel Disk Scrapers
Notched Disk Dimensions:

Model	Diam	Thickness
EAW	711 mm (28")	9.5 mm (3/8")
EABW	813 mm (32")	9.5 mm (3/8")

OPTIONAL EQUIPMENT

Notched Disk Dimensions:

Model	Diam	Thickness
EAW	813 mm (32")	9.5 mm (3/8")

MODELS

EAW Disk spacing: 305 mm (12") - Weight per disk : 148 Kg aprox. (325 lb)

Model	No. of Disks	Cutting Width	HP Motor* Required	Tires (number) (size)	Weight (lb)
EAW 16-28	16	8'4"	110 - 140	2 x 12.5L - 15	5,500
EAW 20-28	20	10'3"	130 - 160	2 x 12.5L - 15	6,400
EAW 24-28	24	12'	150 - 180	2 x 12.5L - 16	7,400
EAW 28-28	28	14'	170 - 200	2 x 12.5L - 16	9,200
EAW 32-28	32	16'	190 - 220	2 x 12.5L - 16	10,200
EAW 36-28	36	18'	210 - 240	4 x 12.5L - 16	11,200
EAW 40-28	40	20'4"	230 - 260	4 x 12.5L - 16	12,445

Specifications subject to change without notice

EABW Disk spacing: 356 mm (14") - Weight per disk: 182 Kg aprox. (400 lb)

Model	No. of Disks	Cutting Width	HP Motor* Required	Tires (number) (size)	Weight (lb)
EABW 16-32	16	10'	135 - 145	2 x 12.5L - 16	5,800
EABW 20-32	20	12'3"	150 - 170	2 x 12.5L - 16	7,880
EABW 24-32	24	14'6"	165 - 175	2 x 12.5L - 16	9,615
EABW 28-32	28	16'8"	175 - 195	4 x 12.5L - 16	11,060
EABW 32-32	32	19'	190 - 220	4 x 12.5L - 16	12,530
EABW 36-32	36	21'	225 - 265	4 x 12.5L - 16	13,990
EABW 40-32	40	23'4"	265 - 295	4 x 12.5L - 16	15,540

Erb & Roberts. Inc.



WHEEL OFFSET HARROW

P. O. BOX 849
MOBILE, ALABAMA 36601 USA
EMAIL: mobile@opico.com
TEL +1 251 438 9881