


# *Power Tillage in Action*

## 1100S SERIES *Ferguson* **TILROVATOR**

U.S. PAT. NOS. 3,066,742 AND 3,125,166

- **WIDEST RANGE OPTIONAL EQUIPMENT TO FIT EVERY JOB**

- **CONVERTS EASILY TO BAND OR BROADCAST TILLAGE**

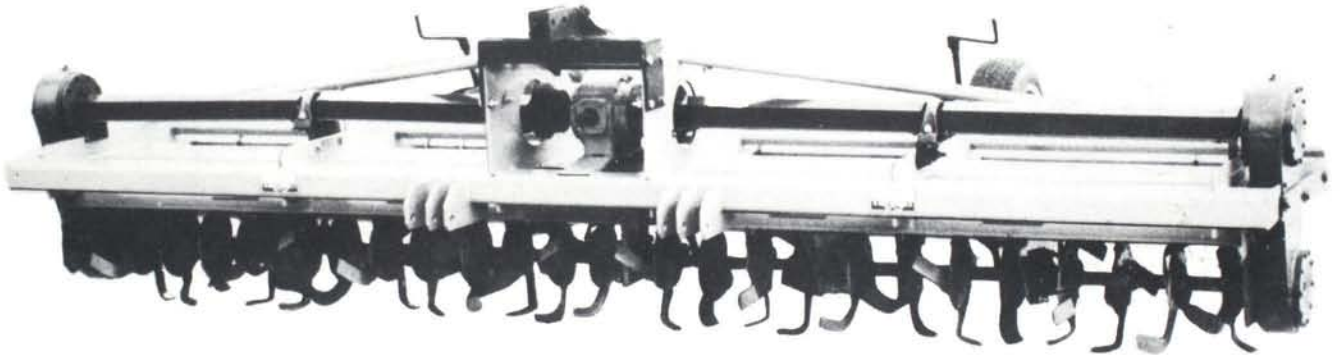

- **SAFETY SHEAR BOLT FOR PROTECTION**
- **TWO PIECE CLAMP ON ROTORS**
- **540 OR 1000 RPM GEAR BOX**
- **CHOICE OF "C" OR "L" BLADES**

***THE MOST VERSATILE OF ALL POWER TILLAGE IMPLEMENTS:***



Prepare seed beds, incorporate herbicides and plant in one pass with the FERGUSON TILROVATOR adapted with unit planters for 8-30" rows. Most unit type planters easily adapted to rear auxiliary bar.



11-320S FERGUSON TILROVATOR designed for 8-40" rows shown incorporating herbicides and maintaining irrigation furrows ahead of corn planter in Southwest Kansas.

Manufactured By **THE FERGUSON MFG. CO., INC.**, P. O. Box 1098, Suffolk, Va. 23434




# Ferguson TILROVATOR

U.S. PAT. NOS. 3,066,743 AND 3,125,166

- ROW CROP CULTIVATION
- SEED BED PREPARATION

- CHEMICAL INCORPORATION FOR WEED CONTROL
- MINIMUM TILLAGE PLANTING

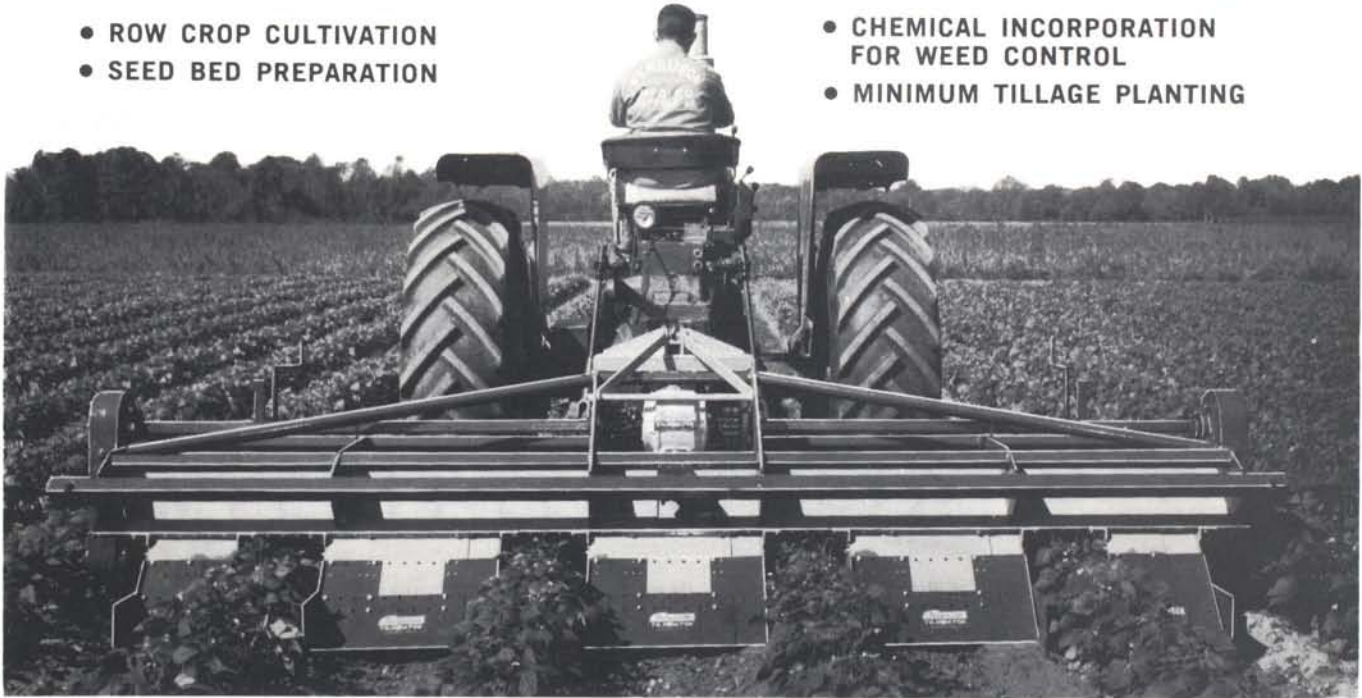

The "WORKHORSE" Model No.11-160S FERGUSON TILROVATOR with Pre-emerge Shields. Note how the shields leave a clean band alongside the row, leaving the pre-emerge chemical undisturbed and potent. These shields also used for band incorporation of herbicides. All models may be converted to either band cultivation or regular cultivation by replacing shields. The pre-emerge shields are adjustable from 8" to 28" widths.

## ACCESSORIES AVAILABLE

- Bedshapers
- Pre-emerge Shields (Cultivating)
- Lister Shanks
- Pump Bracket (Pre-emerge Spray)
- Drive Adapters for Granular Applications
- Hydraulic Gauge Wheels
- Planter Mounting Brackets

## FEATURING

- 2-piece clamp on heavy duty adjustable rotors.
- 1 3/4" hex rotor shaft.
- All drives sealed and running in oil.
- Rugged main frame.
- Exclusive FERGUSON patented blade design.
- Wide variety of attachments to perform on the farm operations all season long.
- Heavy Duty power train for 6-8 plow tractors.
- Heavy Duty end drives with RC-120 drive chain and safety couplings.
- All models available in either 540 or 1000 r.p.m. PTO speeds with either Category #2 or #3 hitch.

## SPECIFICATIONS

Model	Overall Length	Work Length	APP. NT. WT.	Row Widths	Gauge Wheels	Rotors With C type Blades	Rotors With L type Blades
11-120S	130"	120"	1830	Four 30" Six 20"	Optional	18	16
11-136S	146"	136"	1935	Four 28" - 34" Six 22"	Optional	24	18
11-144S	154"	144"	2050	Four 36"	Optional	24	20
11-160S	170"	160"	2068	Four 36" - 40"	Optional	24	22
11-180S	190"	180"	2362	Six 30"	Optional	24	24
11-200S	210"	200"	3310	Special For Beds	Optional	36	26
11-216S	226"	216"	3600	Six 36"	Optional	36	28
11-240S	250"	240"	3635	Eight 30" Six 36" - 40"	Optional	36	32
11-320S	330"	320"	4600	Eight 38" - 40"	Optional	—	42
11-360S	370"	360"	—	Twelve 30"	Optional	—	48



P. O. BOX 849  
MOBILE, ALABAMA 36601 USA  
EMAIL: [mobile@opico.com](mailto:mobile@opico.com)  
TEL +1 251 438 9881

MEMBER



Manufactured By THE FERGUSON MFG. CO., INC., P. O. Box 1098, Suffolk, Va. 23434